


PIN OUT

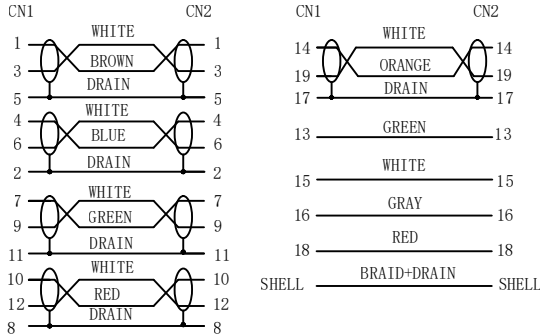

NOTE:

1. Electrical test:
  - (1). 100% open short & miss wire test;
  - (2). Insulation resistance: DC 300V 10M ohm;
  - (3). Contactor resistance: 5 ohm;
  - (4). Computer+Monitor TEST 3840\*2160@60Hz
2. Features
  - Data Transfer: 18Gbps
  - 3840×2160@60Hz 4096×2160@60Hz resolution 4:4:4
  - Integrated HDMI Ethernet Channel (HEC) for Network data transfer up to 100Mbit/s
  - Supports 3D/HDCP2.2/EDID/HDR/ARC/CEC/8PCM/Dolby Digital/DTS/MPEG/DVD-Audio/SACD/Dolby Digital Plus/True HD/dts-HD
3. PRINT WORD: High Speed HDMI® Cable with Ethernet RECYCLED
4. Operating Temperature: -10°C~+60°C
5. Storage Temperature: -20°C~ +80°C
6. RoHS and Reach Compliant
7. The proportion for the recycled material is more than 50%.

MATERIAL LIST:

④	Outer mold	Black RECYCLED PVC	2	
③	Inner mold	LDPE	2	
②	HDMI A/M	19P A/M, Black insulation The Pin Gold Plating, the shell for Gold Plating	2	
①	Cable	(28WG BC*1P+E+AM)*5P+30AWG BC*4C+ADB RECYCLED PVC OD: 7.3±0.2MM	L±T	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2023-12-19	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

11.45.5735	Ultra HDMI + Ethernet Cable, M/M, 4K60, 5m	5000±70
ITEM NO.	DESC.	LENGTH (mm)

