

# C14 Smart-Lock Plug Connector 2X-EA13 / 2X-EA14

## Installation Guide



MISC1000032 05/2023 V3.0

## Package Contents


2X-EA13		2X-EA14	
Qty	Description	Qty	Description
10	C14 Smart-Lock Plug Connector	10	C14 Smart-Lock Plug Connector (Compatible with PE5221T, PE5342T & PG95348)
1	user instructions	1	user instructions

## Installation


To secure a power cable in place, using C14 Smart-Lock Plug Connector, do the following:

**Note:** The unit used in the illustrations below is a C14 EZ-Lok Plug Connector, the procedure for connecting the 2X-EA13 and 2X-EA14 is identical.

1. Slide and attach the Smart-Lock Plug Connector onto a C14 plug until it clicks into place.

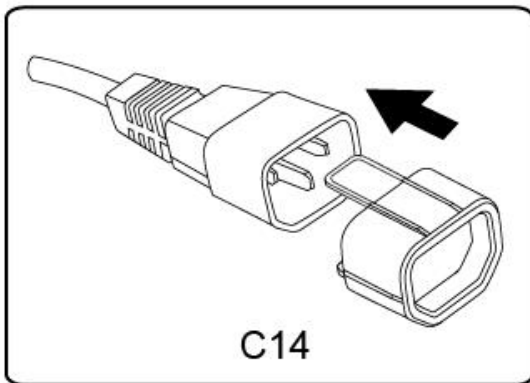

2. Insert the plug, with the Smart-Lock Plug Connector attached, into any available socket on a PDU by sliding it directly over and straight into the socket.

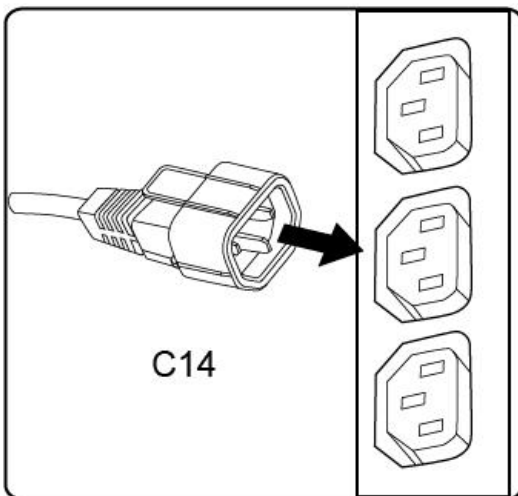

3. To disconnect the plug from the PDU, grip onto and squeeze the Smart-Lock Plug Connector as you pull and detach the plug from the PDU socket.