



Datenblatt - Fiche technique - Data sheet



**21.15.2575**



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, orange, 5,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, orange, 5,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, orange, 5.0 m

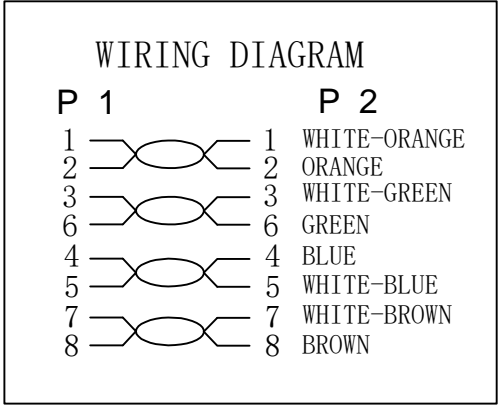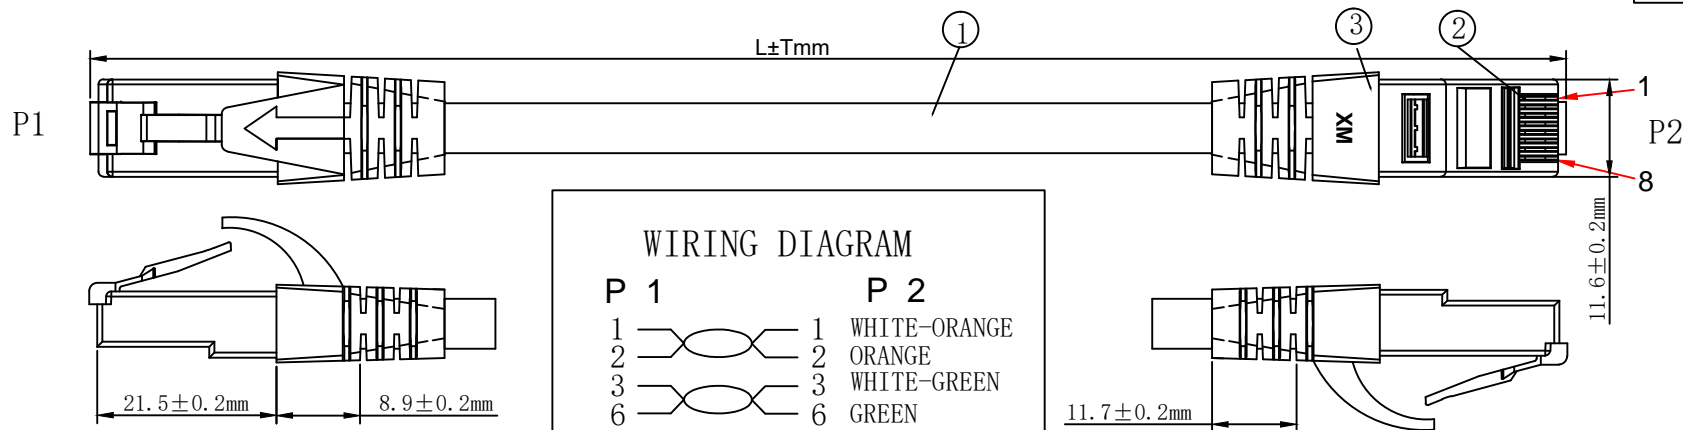

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

- 3. 100% Component Patch cord Test PASS
- 4. Minimum bending radius:50mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Orange	2PCS	
②	CONNECTOR	RJ45 8P8C' S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:Orange (PANTONE:1575C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2947	300mm	±10mm
21. 15. 2570	500mm	±15mm
21. 15. 2571	1000mm	±30mm
21. 15. 2574	1500mm	±45mm
21. 15. 2572	2000mm	±60mm
21. 15. 2573	3000mm	±90mm
21. 15. 2575	5000mm	±150mm
21. 15. 2576	7500mm	±210mm
21. 15. 2577	10000mm	±300mm
21. 15. 2578	15000mm	±450mm
21. 15. 2579	20000mm	±600mm

ITEM NO.	21. 15. 2947	21. 15. 2570	21. 15. 2571	21. 15. 2572	21. 15. 2573
21. 15. 2574	21. 15. 2575	21. 15. 2576	21. 15. 2577	21. 15. 2578	21. 15. 2579
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, Orange				

**SECOMP**

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

NEW 2016-10-20 A