


10G SFP+ Transceiver



Technical Specifications

| Model Name | SFP-2000-MM85-X3 | SFP-2000-SM13-10 |
|------------------------|---|---|
| Data Rate Gigabit | 10G | 10G |
| Center Wave Length | 850nm | 1310nm |
| Laser type | VCSEL | DFB |
| Tx | -1 ~ -7 dBm | -8 ~ 0.5 dBm |
| Rx | -1 ~ -9.9 dBm | -1 ~ -14.4 dBm |
| Voltage | 3.3V | 3.3V |
| Transmission Range | 50/125μm, up to 0.3km | 9/125μm, up to 10km |
| Fiber type (MMF / SMF) | MMF | SMF |
| Connector | LC | LC |
| Dimensions | 55.9 (L) x 14.69 (W) x 12.39 (H) mm | 55.9 (L) x 14.69 (W) x 12.39 (H) mm |
| Operating Temperature | 0°C ~ 70°C (32°F ~ 158°F) | 0°C ~ 70°C (32°F ~ 158°F) |
| Storage Temperature | -40°C ~ 85°C (-40°F ~ 185°F) | -40°C ~ 85°C (-40°F ~ 185°F) |
| Humidity | 5 ~ 90% (non-condensing) | 5 ~ 90% (non-condensing) |
| MSA Compliant | Yes | Yes |
| Certifications | IEC 825, EN 60825-1, FDA 21 CFR 1040.10 and 1040.11 | IEC 825, EN 60825-1, FDA 21 CFR 1040.10 and 1040.11 |

Dimensions

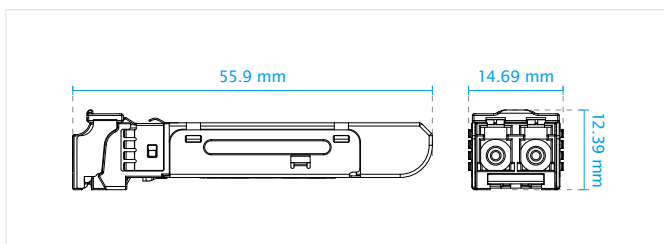

Application

