



NOTE:

1. ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
2. FLUKE Channel TEST:
TEST LIMIT:ISO11801 Channel Class Ea
3. Working temperature:-20°C~+75°C
Storage temperature:-20°C~+80°C
4. RoHS AND REACH compliant
5. PRINT WORD:CAT6A U/UTP 4x2x32AWG/7 RECYCLED PVC ISO11801 & EN50173 & ANSI/TIA568. 2-D
6. Minimum of the bending radius is 4*OD (Suitable for all meters)

PIN OUT

CN1 (568B) CN2 (568B)

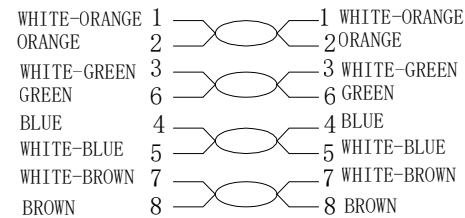

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
③	OVER MOLD	RECYCLED PVC GREY RAL7035	2	
②	PLUG	RJ45 8P8C UNSHIELDED PLUG, PIN GOLD PLATED 3U", COLOUR:TRANSPARENT GREEN	2	
①	CABLE	CAT. 6A U/UTP CABLE (32AWG BC*1P)*4P JACKET:RECYCLED PVC GREY RAL7035 OD:3. 4±0. 2mm	1	
		NEW	2023-11-30	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

21. 45. 3407	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl. EA, SLIM, grey, 5m	5000±100	57.3%
21. 45. 3406	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl. EA, SLIM, grey, 3m	3000±50	57.2%
21. 45. 3405	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl. EA, SLIM, grey, 2m	2000±30	57.1%
21. 45. 3404	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl. EA, SLIM, grey, 1.5m	1500±30	57.0%
21. 45. 3403	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl. EA, SLIM, grey, 1m	1000±20	56.0%
21. 45. 3402	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl. EA, SLIM, grey, 0.5m	500±20	55.5%
21. 45. 3401	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl. EA, SLIM, grey, 0.3m	300±10	54.0%
21. 45. 3400	ROLINE RECYCLED UTP PatchCord, Cat6A/Cl. EA, SLIM, grey, 0.15m	150±10	53.0%
ITEM NO.	DESC.	LENGTH (mm)	The proportion of RECYCLED certification materials

SECOMP