
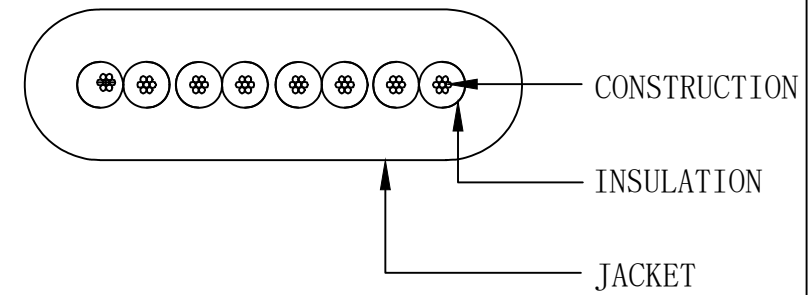


WIRING DIAGRAM



NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. Fluke test
Test limit: ISO 11801 CHANNEL CLASS EA
3. PRINT WORD: CAT6A U/UTP FLAT 4x2x32AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568C. 2
4. ROHS2.0 AND REACH COMPLIANT

MATERIAL LIST

③	OVER MOLD	PVC Colour Red (Pantone 199C)	2	
②	CONNECTOR	RJ45 8P8C Unshielded Plug, Pin Gold Plated, Transparent blue	2	
①	CABLE	(32AWG BC*1P)*4 JACKET: PVC OD: 1.5 ± 0.2 * 6.0 ± 0.2 mm Red (Pantone 199C)	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ITEM	LENGTH
21. 99. 2020	500 ± 30mm
21. 99. 2021	1000 ± 30mm
21. 99. 2024	1500 ± 50mm
21. 99. 2022	2000 ± 50mm
21. 99. 2023	3000 ± 70mm
21. 99. 2025	5000 ± 70mm

		NEW	2022-06-01	A	
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.	

DESC. VALUE Cat.6A UTP PatchCord red

