
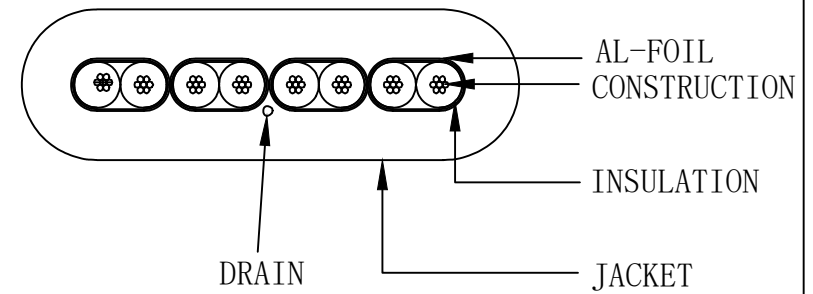


WIRING DIAGRAM

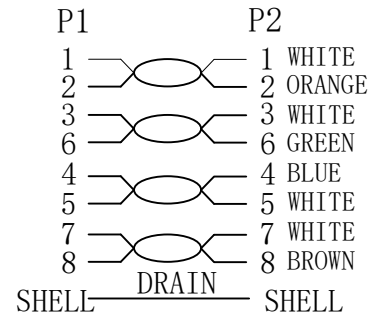

NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. Fluke test
Test limit: ISO 11801 CHANNEL CLASS EA
3. PRINT WORD: CAT6A U/FTP FLAT 4x2x32AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568C. 2
4. ROHS2.0 AND REACH COMPLIANT

MATERIAL LIST

③	OVER MOLD	PVC Colour Red(Pantone 199C)	2	
②	CONNECTOR	RJ45 8P8C shielded Plug, Pin Gold Plated, Transparent Blue	2	
①	CABLE	(32AWG BC*1P+AL-FOIL)*4+E JACKET: PVC OD: 2.0 ± 0.2 * 6.5 ± 0.2mm Red(Pantone 199C)	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK

ITEM	LENGTH
21.99.2120	500 ± 30mm
21.99.2121	1000 ± 30mm
21.99.2124	1500 ± 50mm
21.99.2122	2000 ± 50mm
21.99.2123	3000 ± 70mm
21.99.2125	5000 ± 70mm

DESC. VALUE Cat.6A FTP PatchCord red

		NEW	2019-07-03	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

