


23006-920 CPCI BRIDGE, 32-BIT, 33 MHZ

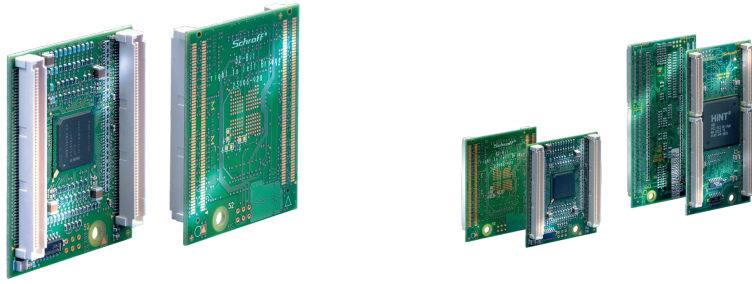

KEY FEATURES

Bridge is designed for primary backplanes with system slot right; bridge for system slot left available on request

33 MHz capable

Bridge mounted on rear of backplane, hence no loss of slots

In accordance with: PICMG 2.6 CompactPCI Bridging Specification, PCI 2.1 PCI Local Bus Specification, Rev. 2.1

PRODUCT ATTRIBUTES

Product Type: Backplane

Backplane Type: CompactPCI Bridge, 32-bit, 33 MHz

System Slot: Right

ADDITIONAL PRODUCT DETAILS

Very compact and low bridge shape, no interference with rear transition boards

CERTIFICATIONS





North America

All locations
+1.763.422.2661
Chat with us:
schroff.nvent.com

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
schroff.nvent.com

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
schroff.nvent.com

Middle East & India

Dubai, United Arab Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
schroff.nvent.com



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.