TP-Link TL-R480T+ Kabelrouter Schwarz

Marke : TP-Link

Artikel-Code: TL-R480T+

Produktname : TL-R480T+

TP-Link TL-R480T+. Netzstandard: IEEE 802.3, IEEE 802.3u, IEEE 802.3x, Verkabelungstechnologie: 10/100Base-T(X), Ethernet LAN Datentransferraten: 10,100 Mbit/s. Management-Protokolle: SNTP, HTTP, Unterstützte Netzwerkprotokolle: TCP/IP, DHCP, ICMP. Unterstützte Sicherheitsalgorithmen: IPSec. Flash-Speicher: 16 MB, Speicherkapazität: 128 MB, Unterstützt Windows-Betriebssysteme: Windows 2000, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home.... Produktfarbe: Schwarz, Rack-Kapazität: 1U, LED-Anzeigen: LAN, Leistung, Status, WAN

WAN connection

Ethernet WAN *	✔

Network

Networking standards *	IEEE 802.3, IEEE 802.3u, IEEE 802.3x
Cabling technology	10/100Base-T(X)
Ethernet LAN data rates	10,100 Mbit/s
Static route	✔
VLAN support	✔
Auto MDI/MDI-X	✘
Policy-based routing	✔

Mobile network

Mobile network generation	Not supported

Management features

Web-based management *	✔
Quality of Service (QoS) support	✔
Universal Plug and Play (UPnP)	✘
Reset button	✔
Firmware upgradeable	✔

Ports & interfaces

Ethernet LAN (RJ-45) ports *	6
Fiber ports quantity	1
DC-in jack	✔

Protocols

DMZ support	✔
Management protocols	SNTP, HTTP
DHCP client *	✔
DHCP server *	✔
Supported network protocols	TCP/IP, DHCP, ICMP

Security

Security algorithms *	IPSec
MAC address filtering	✔
URL filtering	✔
IP address filtering	✔

Security

DoS attack prevention	✔
Access Control List (ACL)	✔
IP-MAC-Port binding	✔

Features

Flash memory	16 MB
Internal memory	128 MB
Windows operating systems supported	Windows 2000, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64
Mac operating systems supported	✔
Linux operating systems supported	✔
Minimum system requirements	1

Design

Product colour *	Black
Rack mounting	✔
Rack capacity	1U
LED indicators	LAN, Power, Status, WAN

Power

AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz

Operational conditions

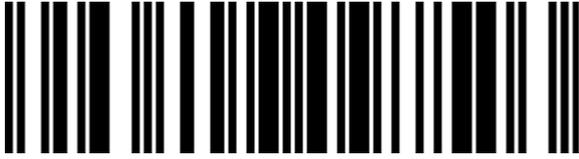|	
Operating temperature (T-T)	0 - 40 °C

Operational conditions

Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	10 - 90%
Storage relative humidity (H-H)	5 - 90%

Weight & dimensions

Width	294 mm
Depth	180 mm
Height	44 mm

Other features

Switch type	Unmanaged

5996409097503