



TP-Link TL-SL1226P Unmanaged Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE) 1U Grau

Marke : TP-Link

Artikel-Code: TL-SL1226P V1

Produktname : TL-SL1226P




TP-Link TL-SL1226P. Switch-Typ: Unmanaged. Basic Switching RJ-45 Ethernet Ports-Typ: Gigabit Ethernet (10/100/1000), Anzahl der basisschaltenden RJ-45 Ethernet Ports: 26. MAC-Adressentabelle: 8000 Eintragungen, Routing-/Switching-Kapazität: 8,8 Gbit/s. Netzstandard: IEEE 802.3af, IEEE 802.3at, IEEE 802.3x. Power over Ethernet (PoE). Rack-Einbau, Formfaktor: 1U

Management-Funktionen		Leistung	
Switch-Typ *	Unmanaged	Energiequelle *	AC
Anschlüsse und Schnittstellen		Netzteil enthalten *	✓
Anzahl der basisschaltenden RJ-45 Ethernet Ports *	26	AC Eingangsspannung	100 - 240 V
Basic Switching RJ-45 Ethernet Ports-Typ *	Gigabit Ethernet (10/100/1000)	AC Eingangsfrequenz	50 - 60 Hz
Fast Ethernet (Kupfer)-Anschlüsse	24	Stromverbrauch (max.)	281 W
Anzahl Gigabit Ethernet (Kupfer) Anschlüsse	2	Power over Ethernet (PoE)	
Anzahl Combo-SPF-Anschlüsse	2	Power over Ethernet (PoE) *	✓
Netzwerk		Anzahl Power over Ethernet plus (PoE+) Anschlüsse	24
Netzstandard *	IEEE 802.3af, IEEE 802.3at, IEEE 802.3x	Power over Ethernet (PoE) Leistung pro Anschluss	30 W
10G-Unterstützung *	✗	Gesamtleistung Power over Ethernet (PoE)	250 W
Kupfer Ethernet Verkabelungstechnologie	10BASE-T, 100BASE-TX, 1000BASE-T	Betriebsbedingungen	
Auto MDI/MDI-X	✓	Betriebstemperatur	0 - 50 °C
Auto-Negotiation-Funktion	✓	Temperaturbereich bei Lagerung	-40 - 70 °C
Datenübertragung		Relative Luftfeuchtigkeit in Betrieb	10 - 90%
Routing-/Switching-Kapazität *	8,8 Gbit/s	Luftfeuchtigkeit bei Lagerung	5 - 90%
Transferrate	6,54 Mpps	Wärmeableitung	1002,54 BTU/h
MAC-Adressentabelle *	8000 Eintragungen	Gewicht und Abmessungen	
Store-and-Forward	✓	Breite	440 mm
Jumbo Frames Unterstützung	✓	Tiefe	180 mm
Jumbo-Frames	10000	Höhe	44 mm
Datenpaket-Pufferspeicher	4,1 MB	Verpackungsdaten	
Design		Schnellstartübersicht	✓
Rack-Einbau *	✓	Rackmontageset	✓
Formfaktor	1U	Verpackungsbreite	528 mm
Produktfarbe	Grau	Verpackungstiefe	250 mm
LED-Anzeigen	✓	Verpackungshöhe	80 mm
Anzahl Lüfter	2 Lüfter	Logistikdaten	
Zertifizierung	CE, FCC, RoHS	Warentarifnummer (HS)	85176990



6935364089443

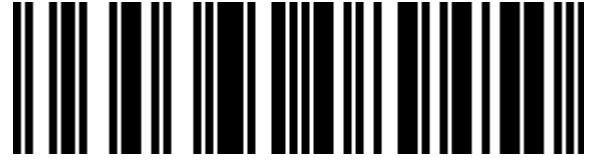

6935364089450



0845973089443



845973089443

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.